


# Avery Dennison

## 64-04 SF



THE FASTEST THERMAL TRANSFER PRINTER  
NOW COMES IN SHEET FORM

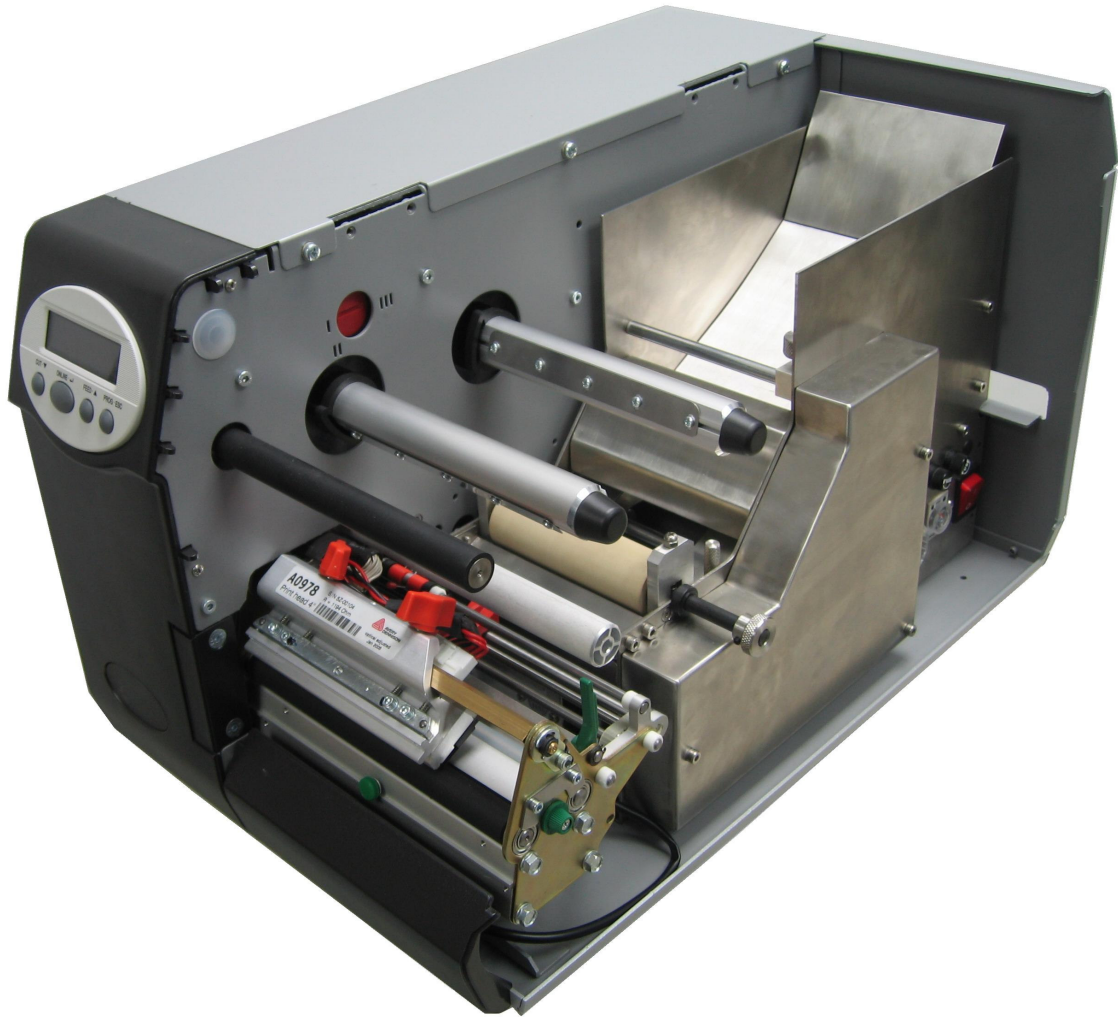

## 64-04 SF Specifications

Print Head	Near Edge print head, 300dpi
Print Speed	4 to 10 inch/sec (106.6 to 355.6 mm/sec)
Print Width	4" (106.6 mm)
Material Width	2" to 4" (50.8 to 106.6 mm)
Material Length	4" to 9" (106.6 to 228.6 mm)
Material Weight	80 – 240 g/m <sup>2</sup>
Foil Capacity	Up to 600m
Foil Saving Mode	From 5mm non-print area
Emulation	Easy Plug, ZPLII
Interfaces	Parallel Centronics, serial RS232/485, Ethernet connection are standard
Memory	16Mb RAM, 32Mb Compact Flash card
Barcode	EAN 8 and 13 with add-on 2 and 5, UPC-A, UPC-E, Code 39, Code 93, Code ITF, Codabar, Code 128, Code 2/5, Code 2/5 Matrix, Code 2/5 Interleaved, Code MSI, UCC/EAN-128, Postcode 2-D barcodes: Data Matrix, PDF 417, MaxiCode
Dimensions	310x305x480 mm
Weight	28.5 kg
Voltage	110v or 220v

Printer Systems Asia Division  
Avery Dennison Building  
No. 7 Chun Ying Street,  
Tseung Kwan O Industrial Estate  
N.T. Hong Kong  
Tel: +852 2372 3169  
Fax: +852 2995 0014  
Email: [printers.asia@ap.averydennison.com](mailto:printers.asia@ap.averydennison.com)  
[www.machines.averydennison.com](http://www.machines.averydennison.com)

